
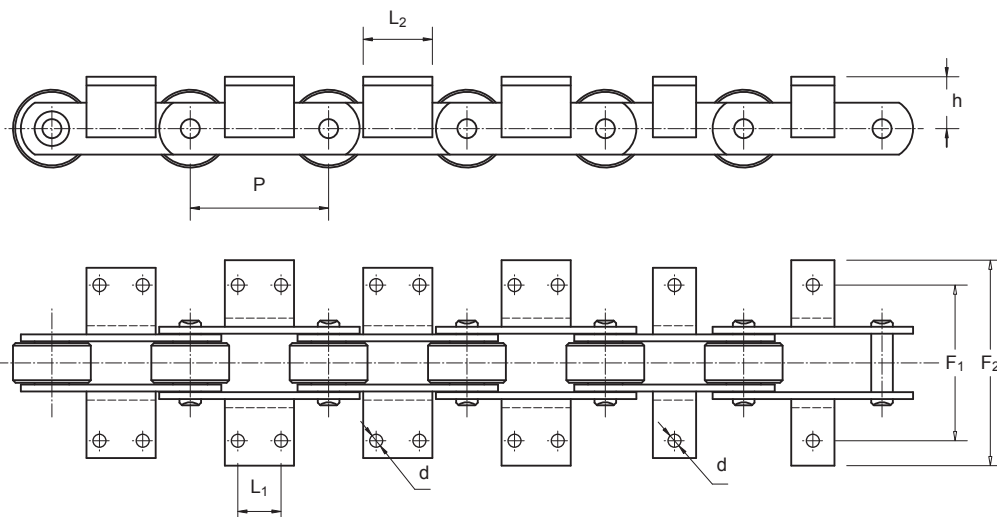


Catene di trasporto con perni pieni

Solid pin conveyor chain

Förderketten mit Vollbolzen

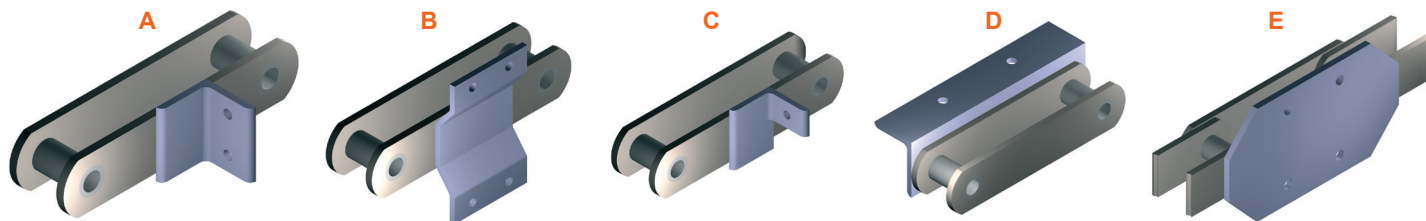

Alette di attacco K1 e K2
Attachments K1 and K2
Befestigungslaschen K1 y K2

Codice Code Bezeichnung ISO/DIN	L	Dimensioni / Dimensions / Abmessungen mm												d	F ₁	F ₂	h	Angolare Angular plates Winkelplatten
		Passo / Pitch / Teilung P																
		40	50	63	80	100	125	160	200	250	315	400	500					
M-80	L ₁	-	-	-	-		50	85	125	125	125			11	96	142	35	40x4
	L ₂ max.	-	-	-	22	22	75	110	150	150	150			14	110	159	40	50x6
M-112	L ₁	-	-	-	-		35	65	100	100	100	100		14	110	159	40	50x6
	L ₂ max.	-	-	-	28	28	65	95	130	130	130	130		14	124	188	45	50x6
M-160	L ₁	-	-	-	-			50	85	145	145	145	145	14	124	188	45	50x6
	L ₂ max.	-	-	-	-	30	30	80	115	175	175	175	175	18	140	218	55	60x8
M-224	L ₁	-	-	-	-				65	125	190	190	190	18	140	218	55	60x8
	L ₂ max.	-	-	-	-		35	35	100	160	225	225	225	18	160	252	65	70x9
M-315	L ₁	-	-	-	-				50	100	155	155	155	18	160	252	65	70x9
	L ₂ max.	-	-	-	-			35	85	135	190	190	190	18	180	288	75	70x9
M-450	L ₁	-	-	-	-					85	155	240	240	24	180	288	75	70x9
	L ₂ max.	-	-	-	-				40	125	195	280	280	24	230	326	90	100x12
M-630	L ₁	-	-	-	-						100	190	300	24	230	326	90	100x12
	L ₂ max.	-	-	-	-					50	150	240	350	30	280	447	110	120x15
M-900	L ₁	-	-	-	-						65	155	240	30	280	447	110	120x15
	L ₂ max.	-	-	-	-					60	125	215	300					